

P. R. HAVENER

Warming churches

ORIGINAL KNEIPLUSH plain velvet

Total thickness 20mm

Description of material:

Fabric

Premium-grade velvet fabric; **100% polyamide 6.6**; extremely hard-wearing; soil-repellent as fibres are impregnated; anti-static; B1 not easily flammable

Fabric weight:	1050 g/RM (width 150 cm)
Resistance to abrasion:	280,000 cycles;
Fastness to rubbing:	> = 5
Light fastness:	> = 5
Fastness to water:	> = 4
Fastness to solvents:	> = 5
Fastness to shampoo:	> = 5

20 shades acc. to colour chart

Structure of upholstery:

Stabilisation layer

Calandred PE latex stabilization layer is welded to the fabric.

Filling foam

Very heavy-duty, high-quality foam, density 140 kg /m³, compressive strength 60.0; height of foam 10 mm


Non-slip adherent foam

5 mm non-slip adherent foam with PES/glass fibre primary backing material, can be wet-washed.

Adhesive and bound seam

Special adhesive, solvent-free, for bonding the different materials; triple seamed under high pressure with tear-resistant special polyamide yarn

Cross section of upholstery

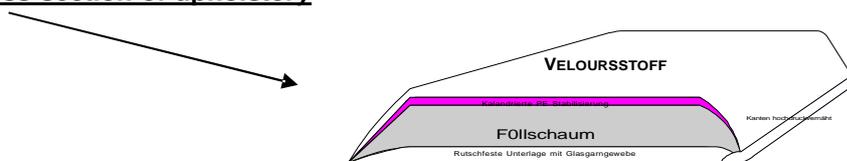

Production method

Velvet fabric with calandred stabilisation layer, filling foam and non-slip adherent foam are all welded together; in addition, the edges of all the materials are sewn together under high pressure.

Characteristics of the Havener pew upholstery

It can be removed and put back at any time without damaging the kneeling surface. Upholstery is guaranteed to be easy to clean and care for, as the fabric has been rendered soil-repellent by impregnating the fibres. The upholstery is wrinkle-free and will not be deformed. The PE latex coating on the underside of the fabric provides protection against moisture, which prevents liquids from penetrating the foam. As all the high-quality materials are sewn and bonded together, there is no possibility of the edges opening up. An extremely long lifespan is guaranteed.

Made to measure

The upholstery is made to measure for each individual pew **exactly, without seams**; corners, curves, diagonal edges and recesses are finished individually.

Attaching hassocks

The hassocks are attached with a special-purpose adhesive tape.

Warranty 15-year warranty on all the upholstery